





——Sizes & Finish——600x600mm / 300x600mm | Glossy / Matt




Please scan the code for more product details.





An Elegant designation A noble Pattern

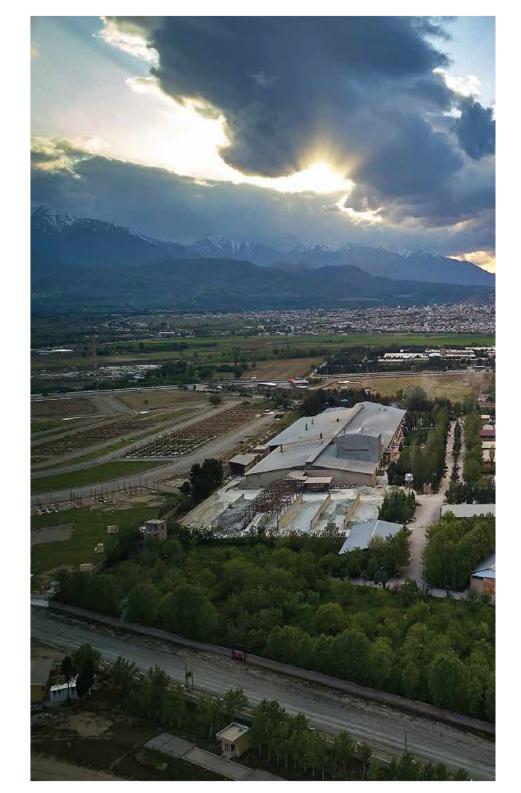



Jam Tile Corporation was put into operation in 2001. This organization started the area of its activity with producing floor tiles and has always endeavored to manufacture products with higher quality and also more diversity from the very beginning.

Jam Tile is fully capable of producing tiles in dimensions of 33*33, 20*20, 40*40 and has recently succeeded in producing 60*60 tiles, benefiting from the modern technology of digital printing and cutting mechanism as well and yet considering an outlook of producing tiles in dimensions of 120*60 by utilizing the Nano Coating technology forthcoming. With the aim of enhancing the quality of the products, Jam Tile Has started producing brand new products in cooperation with Spanish enterprise "Vidres", and has begun a new chapter in defining the quality and attraction of the products inspired by the beautiful and authentic designs of this company.

Today Jam company is one of the major manufacturers with the highest standards in tile industry, recruiting the most up to date technology in the world and skillful experts that will be constantly striving for maintaining innovation.



Production Process

Tile production is accomplished in different phases at Jam tile plant facility. The QC unit has a vital role and monitors each and every stage of the production program all over.

Tile production begins at the stone crusher unit. At this stage used stones are crushed and prepared for the whole production process. Afterwards prepped powders are transferred to the grout making unit in order for providing the primary mortar for making the tiles. At dryer pressing spray unit, the made grout is placed under air pressure and then gets dried and solidified by a particular method.

Accordingly the primary and the raw mold of the product is prepared, yet the production process is halfway through because it takes much longer to attain an acceptable product. Following this stage, the well formed tiles are transferred to moisture evaporating or "Dryer" unit for dropping their internal dampness. The glaze of a tile and ceramic is sort of a cover which is placed on the surface of a tile or a ceramic. glazes are typically come in coarse grained powder, either colored or black and white which are get mixed with water after grinding and turn into the state of grout and placed on the surface of the ceramics and tiles like a thin layer using many different methods and then transferred into the furnace for heating under different temperatures depending on the material and considerable output. Packaging of the tiles and ceramics has an essential significance and during the packaging and sorting process the most possible and extreme accuracy is applied. With possessing unparalleled standards, the QC unit applies a comprehensive and precise monitoring on the terms, packages grades and the proper quantity of the tiles in every single packages.



DIGITAL PRINTING RANDOM FACES



ANDERIA

Size: 600x600mm | 300x600 mm

Surface: Glossy

Faces: 1 Face

Thickness: 10mm (Approx)




Anderia White



JAM TILE CO.
WWW.jamtile.ir



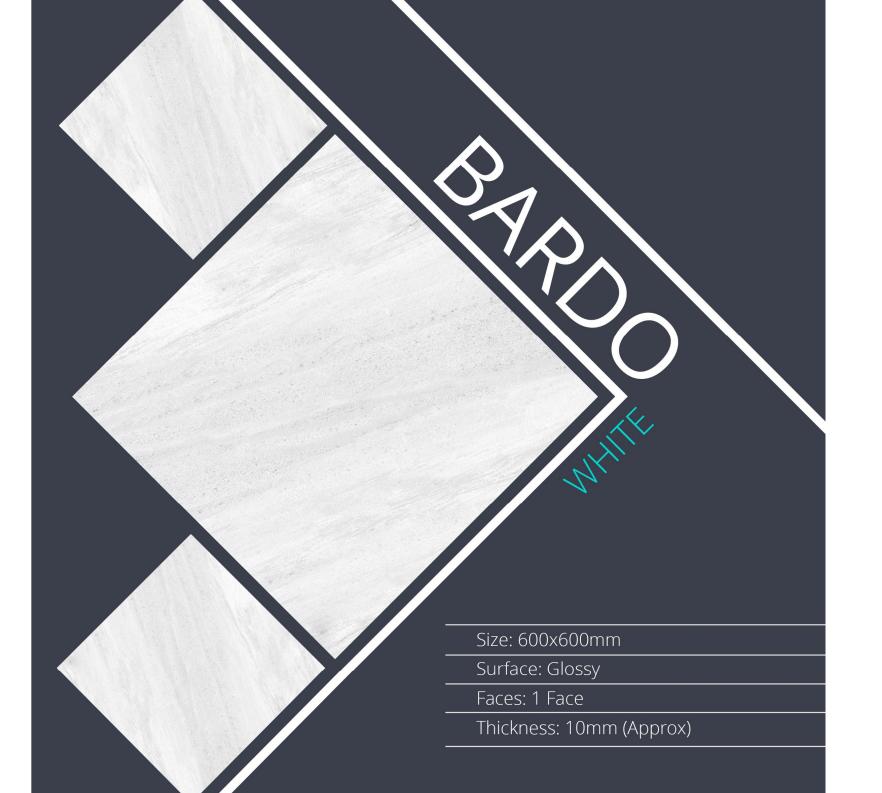



600 x 600 mm | Glossy

Size: 600x600mm

Surface: Glossy

Faces: 1 Face

Thickness: 10mm (Approx)





ZHULIN










Plano Bone



SIZE 60X60CM FINISH GLOSSY

THICKNESS 10MM

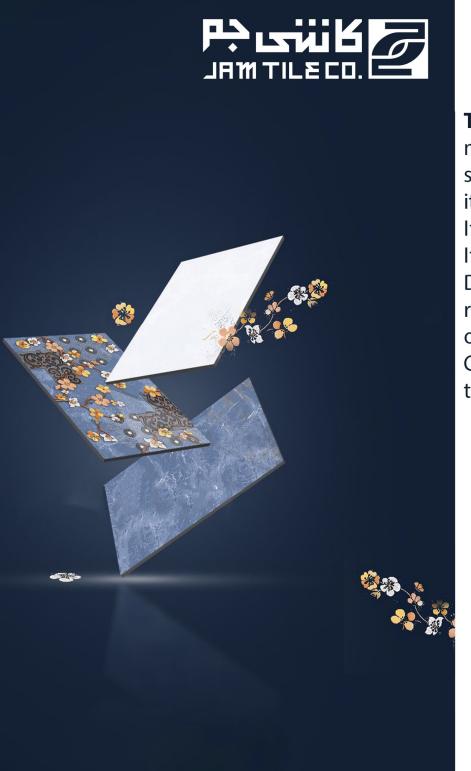

Tiles and ceramics are a kind of materials. It is a building made of soil. It is made of finely milled clay, it becomes and becomes a form. It is glazed and then heated It is cooked on top. These tiles Due to durability, water resistance and the attractiveness of beauty, usually for Covering the floor, walls and tables are used



















Features and uses of ceramic tiles:

*Durability: Ceramic tiles have a long shelf life And they are resistant to wear and for high traffic areas are suitable

*Water resistance: Glazed ceramic tiles in They are impermeable to water and for bathrooms, kitchens and others Moisture prone areas are ideal

*Beautiful variety: in a wide variety of colors, patterns ,Sizes and finishes available

*Ease of maintenance: clean ceramic tiles and They are relatively easy to maintain

*Temperature resistance: they can withstand high temperatures, Tolerate and for the areas near the stove and Fireplaces are suitable









Safe &



Design Varaities

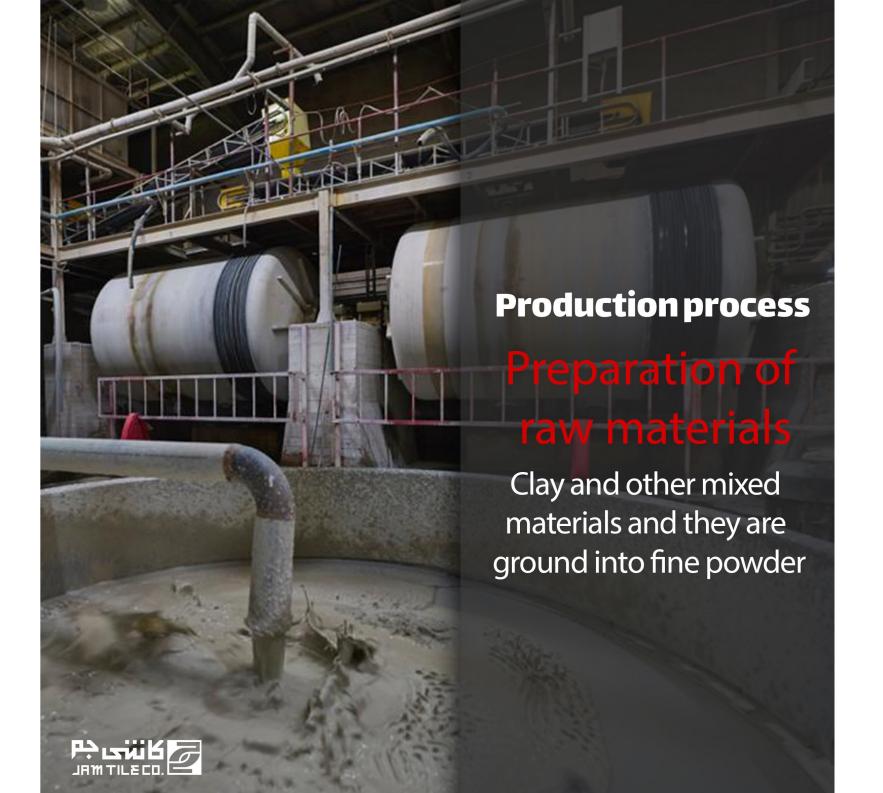



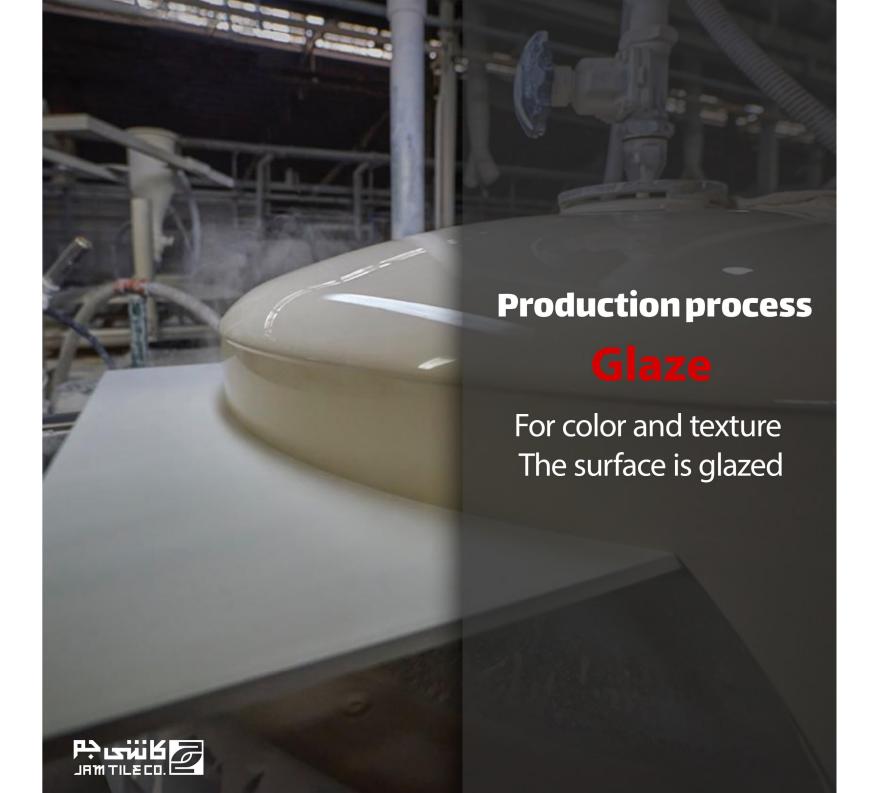





Viana Gold Size: 600x600mm Surface: Glossy Faces: 2 Faces Thickness: 10mm (Approx)



Surface: Glossy

Size: 600x600 mm

Face: 1 Face

Thickness: 10 mm (Approx)

JAM TILE CO.





Katrin

Size: 600x600 mm

Surface: Glossy

Face: 1 Face

Thickness: 10 mm (Approx)





Katrin bone

Size: 600x600 mm

Surface: Glossy

Face: 1 Face

Thickness: 10 mm (Approx)

www.jamtile.ir-




PARS CREAM

Size: 600x600 mm

Surface: Glossy

Face: 2 Faces

Thickness: 10 mm (Approx)







Victoria Bone

Face: 3 Faces

Surface Glossy

www.jamtile.ir

Thickness: 10 mm (Approx) / Size: 600x600 mm






Follow and Subscribe Us:




Please scan the code





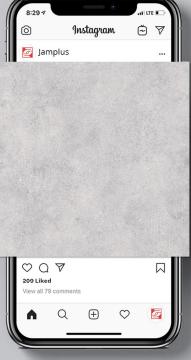









Leap into the embrace of **ECCENTRIC** innovations

Head Office Tel: (0098 21) 88725315

Fax: (0098 21) 88711229

Factory Tel: (0098 66) 42455287

Fax: (0098 66) 42455601





ZHICO GRAY



ZHICO LIGHT GRAY

Concept:

ZHICO

[60 x 60]







Size: 600x600mm

Surface: Matt

Faces: 3 Face







CARNET Dark Gray

600x 600mm










Digital Square Matt printing



GARNET Dark Gray

One MATTE 600X Face GLAZE 600MM





Size: 600x600 mm

Thickness: 10 mm (Approx)

Face: 1 Face

Anabel Gray

Anabel Cream

AYLAR

Glossy | Matt



Face: 1 Face

Size: 600x600 mm

Barish

Size: 600x600 mm



www.jamtile.iı


Thickness: 10 mm (Approx)

Face: 1 Face

SEMENT GRAY

Face: 4 Faces

Size: 600x600 mm

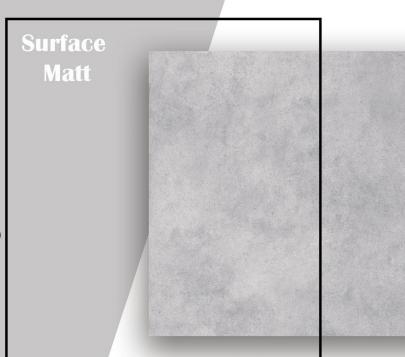



Surface Glossy	CREAM
	Face: 4 Faces Size: 600x600 mm
	Thickness: 10 mm (Approx)



GARNET Beige | Matt

Face: 1 Face

Size: 600x600 mm

www.jamtile.ir



JAM TILE CO.





Katrin bone


Size: 600x600 mm

Surface: Glossy

Face: 1 Face

Thickness: 10 mm (Approx)

www.jamtile.ir-

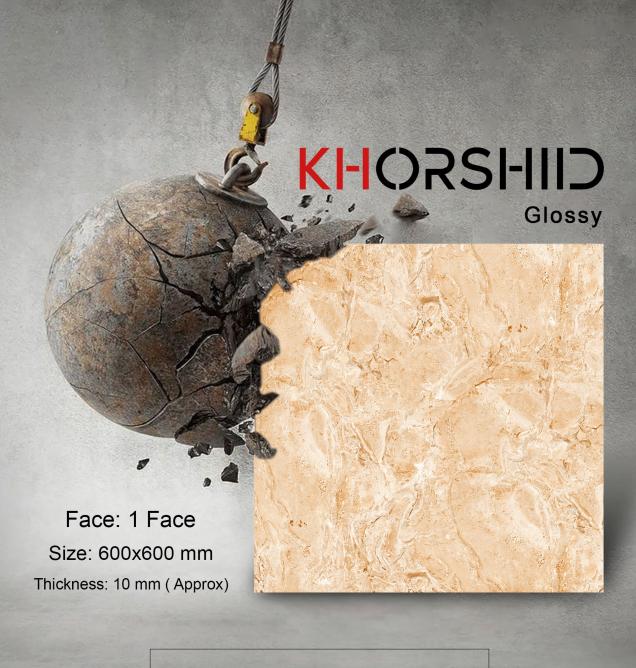

www.jamtile.i



GLOSSY | matt

Face: 1 Face

Size: 600x600 mm

MAIITA3 GLOSSY | matt Face: 1 Face Size: 600x600 mm Thickness: 10 mm (Approx) www.jamtile.ir

Surface Glossy



Size: 600x600 mm

Face: 1 Face



Face: 2 Faces

Size: 600x600 mm

Thickness: 10 mm (Approx)





www.jamtile.ir

Surface Glossy

Size: 600x600 mm


Thickness: 10 mm (Approx)

Face: 1 Face







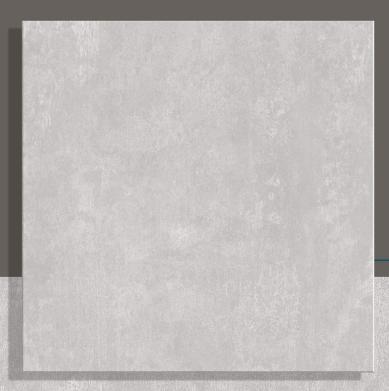

Surface: Glossy

Size: 600x600 mm

Face: 1 Face

PEYTON

GLOSSY | matt

www.jamtile.ir

Face: 1 Face

Size: 600x600 mm

Rambod

Cream Gray



Thickness: 10 mm (Approx)

60x60 CM

www.jamtile.ir

Satoria

Glossy | Matt



Face: 3 Faces

Thickness: 10 mm (Approx)

60x60 CM

www.jamtile.ir

SETARE Size: 600x600 mm Face: 1 Face Thickness: 10 mm (Approx) Surface Glossy www.jamtile.ir



